
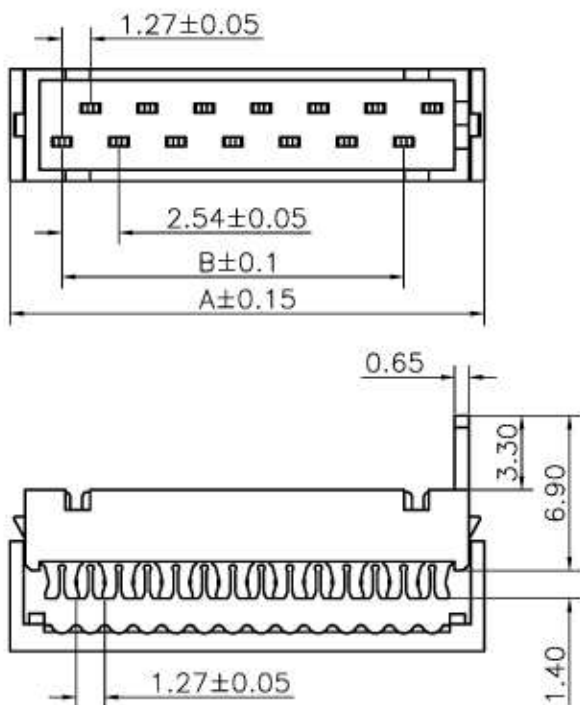


Circuits	Dimension		Circuits	Dimension	
	A	B		A	B
4	8.45	2.54	16	23.69	17.78
6	10.99	5.08	18	26.23	20.32
8	13.53	7.62	20	28.77	22.86
10	16.07	10.16	22	31.31	25.40
12	18.61	12.70	24	33.85	27.94
14	21.15	15.24	26	36.39	30.48

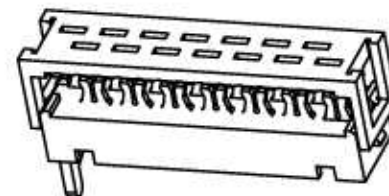

Specifications:

Current Rating: 1.0A AC/DC

Voltage Rating: 30V AC/DC

Contact Resistance: 20m ohm. Max.

Insulation Resistance: 1000M ohm. Min.

Withstanding Voltage: 500V AC For One Minute

Operating Temperature Range: -40°C ~ +105°C

Material and Finish

Insulator: High Temp. Plastic (UL94V-0)

Contact: Copper Alloy

Finish: Tin Plated

How to Order

TMM-X-X-XX-X

Type

- 1-IDC Male
- 2-IDC Plug
- 3-DIP Male Straight
- 4-DIP Female Straight
- 5-DIP Female R/A
- 6-SMT Female Straight

Locking System

- 0-without lock
- L-with lock

Packaging

- 1 - Tape & Reel
- 2 - Tube
- 3 - Bag

Number of Positions
04, 06, 08, 10, 12,
14, 16, 18 or 20

TOLERANCE (mm)	APPROVALS		DATE	TITLE Micro Match IDC type Male		AMPHENOL Amphenol European Design Center				
X, ±0.3	DESIGN Stephane	2006/04/22	Scale N.A.					Sheet 1 of 1		
X.X, ±0.1	CHECKED Rob K.	2006/04/23								
X.XX, ±0.05	APPROVED Rob K.	2006/04/23								
UNLESS OTHERWISE SPECIFIED		UNIT MM	SIZE A4	DRAWING N°	TMM-1-0-XX-X		REV A			