

# ALUMINUM ELECTROLYTIC CAPACITORS

nichicon

## UCD

Chip Type, Low Impedance



For SMD



Low Impedance



Anti-Solvent Feature



- Chip type, low impedance temperature range up to +105°C.
- Designed for surface mounting on high density PC board.
- Applicable to automatic mounting machine fed with carrier tape.
- Compliant to the RoHS directive (2011/65/EU).




## Specifications


| Item                          | Performance Characteristics                                                                                                                                                                                                             |                 |      |                    |      |                                                                                                                |      |      |      |      |   |
|-------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-----------------|------|--------------------|------|----------------------------------------------------------------------------------------------------------------|------|------|------|------|---|
| Category Temperature Range    | - 55 to +105°C                                                                                                                                                                                                                          |                 |      |                    |      |                                                                                                                |      |      |      |      |   |
| Rated Voltage Range           | 6.3 to 100V                                                                                                                                                                                                                             |                 |      |                    |      |                                                                                                                |      |      |      |      |   |
| Rated Capacitance Range       | 1 to 3300F                                                                                                                                                                                                                              |                 |      |                    |      |                                                                                                                |      |      |      |      |   |
| Capacitance Tolerance         | ±20% at 120Hz, 20°C                                                                                                                                                                                                                     |                 |      |                    |      |                                                                                                                |      |      |      |      |   |
| Leakage Current               | After 2 minutes' application of rated voltage at 20°C, leakage current is not more than 0.01 CV or 3 (μA), whichever is greater.                                                                                                        |                 |      |                    |      |                                                                                                                |      |      |      |      |   |
| Tangent of loss angle (tan δ) | Measurement frequency : 120Hz at 20°C                                                                                                                                                                                                   |                 |      |                    |      |                                                                                                                |      |      |      |      |   |
|                               | Rated voltage (V)                                                                                                                                                                                                                       | 6.3             | 10   | 16                 | 25   | 35                                                                                                             | 50   | 63   | 80   | 100  |   |
|                               | tan δ (MAX.)                                                                                                                                                                                                                            | 0.26            | 0.19 | 0.16               | 0.14 | 0.12                                                                                                           | 0.10 | 0.08 | 0.08 | 0.07 |   |
|                               | For capacitance of more than 1000μF, add 0.02 for every increase of 1000μF.                                                                                                                                                             |                 |      |                    |      |                                                                                                                |      |      |      |      |   |
| Stability at Low Temperature  | Measurement frequency : 120Hz                                                                                                                                                                                                           |                 |      |                    |      |                                                                                                                |      |      |      |      |   |
|                               | Rated voltage (V)                                                                                                                                                                                                                       | 6.3             | 10   | 16                 | 25   | 35                                                                                                             | 50   | 63   | 80   | 100  |   |
|                               | Impedance ratio<br>ZT / Z20 (MAX.)                                                                                                                                                                                                      | Z—25°C / Z+20°C | 2    | 2                  | 2    | 2                                                                                                              | 2    | 2    | 2    | 2    | 2 |
|                               |                                                                                                                                                                                                                                         | Z—40°C / Z+20°C | 3    | 3                  | 3    | 3                                                                                                              | 3    | 3    | 3    | 3    | 3 |
|                               |                                                                                                                                                                                                                                         | Z—55°C / Z+20°C | 4    | 4                  | 4    | 3                                                                                                              | 3    | 3    | 3    | 3    | 3 |
| Endurance                     | The specifications listed at right shall be met when the capacitors are restored to 20°C after the rated voltage is applied for 5000 hours (2000 hours for L < 10 mm: 50V or less, and for L ≤ 10mm: 63V or more) at 105°C.             |                 |      | Capacitance Change |      | Within ± 30% of the initial capacitance value                                                                  |      |      |      |      |   |
|                               |                                                                                                                                                                                                                                         |                 |      | tan δ              |      | 200% or less than the initial specified value<br>300% or less than the initial specified value for 63V or more |      |      |      |      |   |
|                               |                                                                                                                                                                                                                                         |                 |      | Leakage current    |      | Less than or equal to the initial specified value                                                              |      |      |      |      |   |
| Shelf Life                    | After storing the capacitors under no load at 105°C for 1000 hours and then performing voltage treatment based on JIS C 5101-4 clause 4.1 at 20°C, they shall meet the specified values for the endurance characteristics listed above. |                 |      |                    |      |                                                                                                                |      |      |      |      |   |
| Resistance to soldering heat  | The capacitors are kept on a hot plate for 30 seconds, which is maintained at 250°C. The capacitors shall meet the characteristic requirements listed at right when they are removed from the plate and restored to 20°C.               |                 |      | Capacitance Change |      | Within ± 10% of the initial capacitance value                                                                  |      |      |      |      |   |
|                               |                                                                                                                                                                                                                                         |                 |      | tan δ              |      | Less than or equal to the initial specified value                                                              |      |      |      |      |   |
|                               |                                                                                                                                                                                                                                         |                 |      | Leakage current    |      | Less than or equal to the initial specified value                                                              |      |      |      |      |   |
| Marking                       | Black print on the case top.                                                                                                                                                                                                            |                 |      |                    |      |                                                                                                                |      |      |      |      |   |

## Chip Type


(φ4 to φ8 × 6.2)

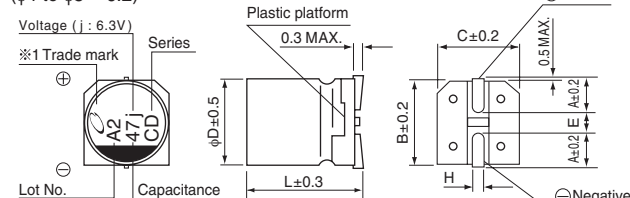

(φ8 × 10, φ10)

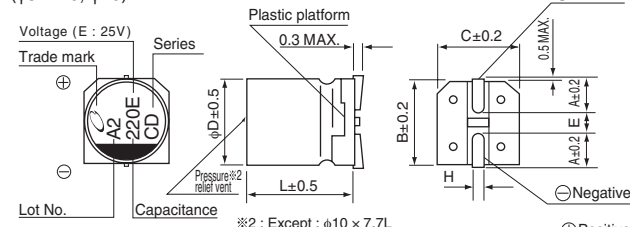


(φ12.5 to φ18)

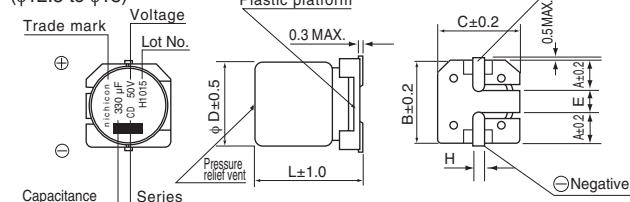

※φ8 × 10L, φ10 × 10L, φ12.5 × 13.5L, φ16 × 16.5L, φ18 × 16.5L :  
The vibration structure-resistant product is also available upon request, please ask for details.

## Type numbering system (Example : 16V 100μF)

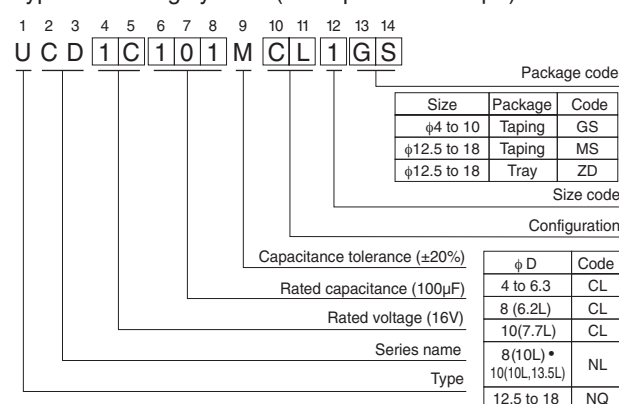

| φD × L | 4 × 5.8    | 5 × 5.8    | 6.3 × 5.8  | 6.3 × 7.7  | 8 × 6.2    | 8 × 10     | 10 × 7.7   | 10 × 10    | (mm) |
|--------|------------|------------|------------|------------|------------|------------|------------|------------|------|
| A      | 1.8        | 2.1        | 2.4        | 2.4        | 3.3        | 2.9        | 3.2        | 3.2        |      |
| B      | 4.3        | 5.3        | 6.6        | 6.6        | 8.3        | 8.3        | 10.3       | 10.3       |      |
| C      | 4.3        | 5.3        | 6.6        | 6.6        | 8.3        | 8.3        | 10.3       | 10.3       |      |
| E      | 1.0        | 1.3        | 2.2        | 2.2        | 2.3        | 3.1        | 4.5        | 4.5        |      |
| L      | 5.8        | 5.8        | 5.8        | 7.7        | 6.2        | 10         | 7.7        | 10         |      |
| H      | 0.5 to 0.8 | 0.5 to 0.8 | 0.5 to 0.8 | 0.5 to 0.8 | 0.5 to 0.8 | 0.8 to 1.1 | 0.8 to 1.1 | 0.8 to 1.1 |      |

| φD × L | 10 × 13.5  | 12.5 × 13.5 | 16 × 16.5  | 18 × 16.5  |
|--------|------------|-------------|------------|------------|
| A      | 3.2        | 4.8         | 5.4        | 6.4        |
| B      | 10.3       | 13.6        | 17.1       | 19.1       |
| C      | 10.3       | 13.6        | 17.1       | 19.1       |
| E      | 4.5        | 4.0         | 6.3        | 6.3        |
| L      | 13.5       | 13.5        | 16.5       | 16.5       |
| H      | 0.8 to 1.1 | 1.0 to 1.4  | 1.0 to 1.4 | 1.0 to 1.4 |

| V    | 6.3 | 10 | 16 | 25 | 35 | 50 | 63 | 80 | 100 |
|------|-----|----|----|----|----|----|----|----|-----|
| Code | j   | A  | C  | E  | V  | H  | J  | K  | 2A  |

• Dimension table in next page.

## ■ Dimensions

| V<br>Cap. (μF) Code | 6.3 |             |      | 10   |             |      | 16      |             |      | 25      |             |       | 35        |             |       | 50          |                             |           |                 |
|---------------------|-----|-------------|------|------|-------------|------|---------|-------------|------|---------|-------------|-------|-----------|-------------|-------|-------------|-----------------------------|-----------|-----------------|
|                     | 0J  |             |      | 1A   |             |      | 1C      |             |      | 1E      |             |       | 1V        |             |       | 1H          |                             |           |                 |
| 1                   | 010 |             |      |      |             |      |         |             |      |         |             |       |           |             |       | 4 × 5.8     | 2.70                        | 60        |                 |
| 2.2                 | 2R2 |             |      |      |             |      |         |             |      |         |             |       |           |             |       | 4 × 5.8     | 2.70                        | 60        |                 |
| 3.3                 | 3R3 |             |      |      |             |      |         |             |      |         |             |       |           |             |       | 4 × 5.8     | 2.70                        | 60        |                 |
| 4.7                 | 4R7 |             |      |      |             |      |         |             |      |         |             |       |           | 4 × 5.8     | 1.35  | 90          | 4 × 5.8                     | 2.70      | 60              |
| 10                  | 100 |             |      |      |             |      | 4 × 5.8 | 1.35        | 90   | 4 × 5.8 | 1.35        | 90    | ● 4 × 5.8 | 1.35        | 90    | ● 5 × 5.8   | 1.50                        | 90        |                 |
|                     |     |             |      |      |             |      |         |             |      |         |             |       | 5 × 5.8   | 0.70        | 160   | 6.3 × 5.8   | 0.86                        | 170       |                 |
| 15                  | 150 |             |      |      |             |      | 4 × 5.8 | 1.35        | 90   | 5 × 5.8 | 0.70        | 160   |           |             |       |             |                             |           |                 |
| 22                  | 220 | 4 × 5.8     | 1.35 | 90   | 4 × 5.8     | 1.35 | 90      | ● 4 × 5.8   | 1.35 | 90      | 5 × 5.8     | 0.70  | 160       | 5 × 5.8     | 0.70  | 160         | 6.3 × 5.8                   | 0.86      | 170             |
|                     |     |             |      |      |             |      |         | 5 × 5.8     | 0.70 | 160     |             |       |           |             |       |             |                             |           |                 |
| 27                  | 270 | 4 × 5.8     | 1.35 | 90   | 5 × 5.8     | 0.70 | 160     | 5 × 5.8     | 0.70 | 160     | 6.3 × 5.8   | 0.36  | 240       |             |       |             |                             |           |                 |
| 33                  | 330 | 5 × 5.8     | 0.70 | 160  | ● 4 × 5.8   | 1.35 | 90      | 6.3 × 5.8   | 0.36 | 240     | ● 5 × 5.8   | 0.70  | 160       | 6.3 × 5.8   | 0.36  | 240         | 6.3 × 7.7                   | 0.66      | 195             |
|                     |     |             |      |      | 5 × 5.8     | 0.70 | 160     |             |      |         | 6.3 × 5.8   | 0.36  | 240       |             |       |             | ● 8 × 6.2                   | 0.63      | 200             |
| 47                  | 470 | ● 4 × 5.8   | 1.35 | 90   | 6.3 × 5.8   | 0.36 | 240     | ● 5 × 5.8   | 0.70 | 160     | 6.3 × 5.8   | 0.36  | 240       | 6.3 × 5.8   | 0.36  | 240         | 6.3 × 7.7                   | 0.66      | 195             |
|                     |     | 5 × 5.8     | 0.70 | 160  |             |      |         | 6.3 × 5.8   | 0.36 | 240     |             |       |           | 6.3 × 5.8   | 0.36  | 240         | ● 8 × 6.2                   | 0.63      | 200             |
| 56                  | 560 | 5 × 5.8     | 0.70 | 160  | 6.3 × 5.8   | 0.36 | 240     | 6.3 × 5.8   | 0.36 | 240     | 6.3 × 5.8   | 0.36  | 240       |             |       |             |                             |           |                 |
| 68                  | 680 | 6.3 × 5.8   | 0.36 | 240  | 6.3 × 5.8   | 0.36 | 240     | 6.3 × 5.8   | 0.36 | 240     | 6.3 × 5.8   | 0.36  | 240       | 6.3 × 7.7   | 0.32  | 290         |                             |           |                 |
| 100                 | 101 | ● 5 × 5.8   | 0.70 | 160  | 6.3 × 5.8   | 0.36 | 240     | 6.3 × 5.8   | 0.36 | 240     | 6.3 × 7.7   | 0.32  | 290       | ● 6.3 × 7.7 | 0.32  | 290         | 8 × 10                      | 0.32      | 350             |
|                     |     | 6.3 × 5.8   | 0.36 | 240  |             |      |         | 6.3 × 5.8   | 0.36 | 240     | ● 8 × 6.2   | 0.26  | 300       | 8 × 10      | 0.16  | 600         | ● 10 × 7.7                  | 0.36      | 330             |
| 150                 | 151 | 6.3 × 5.8   | 0.36 | 240  | 6.3 × 5.8   | 0.36 | 240     | 6.3 × 7.7   | 0.32 | 290     | 8 × 10      | 0.16  | 600       | 8 × 10      | 0.16  | 600         | 10 × 10                     | 0.16      | 700             |
|                     |     |             |      |      |             |      |         | ● 10 × 7.7  | 0.18 | 600     | ● 10 × 7.7  | 0.18  | 600       | ● 10 × 7.7  | 0.18  | 600         |                             |           |                 |
| 220                 | 221 | 6.3 × 5.8   | 0.36 | 240  | 6.3 × 7.7   | 0.32 | 290     | 6.3 × 7.7   | 0.32 | 290     | 8 × 10      | 0.16  | 600       | 8 × 10      | 0.16  | 600         | 10 × 10                     | 0.16      | 700             |
|                     |     |             |      |      | ● 8 × 6.2   | 0.26 | 300     | ● 8 × 6.2   | 0.26 | 300     | ● 10 × 7.7  | 0.18  | 600       | ● 10 × 7.7  | 0.18  | 600         |                             |           |                 |
| 330                 | 331 | 6.3 × 7.7   | 0.32 | 290  | 8 × 10      | 0.16 | 600     | 8 × 10      | 0.16 | 600     | 8 × 10      | 0.16  | 600       | 10 × 10     | 0.08  | 850         | ● 10 × 13.5                 | 0.14      | 800             |
|                     |     | ● 8 × 6.2   | 0.26 | 300  | ● 10 × 7.7  | 0.18 | 600     | ● 10 × 7.7  | 0.18 | 600     |             |       |           | 10 × 10     | 0.08  | 850         | 12.5 × 13.5                 | 0.12      | 900             |
| 390                 | 391 |             |      |      |             |      |         |             |      |         |             |       |           |             |       | 12.5 × 13.5 | 0.12                        | 900       |                 |
| 470                 | 471 | 8 × 10      | 0.16 | 600  | 8 × 10      | 0.16 | 600     | 8 × 10      | 0.16 | 600     | 10 × 10     | 0.08  | 850       | ● 10 × 13.5 | 0.08  | 950         | 16 × 16.5                   | 0.073     | 1610            |
|                     |     | ● 10 × 7.7  | 0.18 | 600  | ● 10 × 7.7  | 0.18 | 600     | ● 10 × 7.7  | 0.18 | 600     |             |       |           | 12.5 × 13.5 | 0.08  | 1100        |                             |           |                 |
| 680                 | 681 | 8 × 10      | 0.16 | 600  | 10 × 10     | 0.08 | 850     | 10 × 10     | 0.08 | 850     | 10 × 13.5   | 0.08  | 950       | 12.5 × 13.5 | 0.08  | 1100        | 16 × 16.5                   | 0.073     | 1610            |
|                     |     | ● 10 × 7.7  | 0.18 | 600  |             |      |         |             |      |         |             |       |           |             |       |             |                             |           |                 |
| 1000                | 102 | 8 × 10      | 0.16 | 600  | 10 × 10     | 0.08 | 850     | 10 × 13.5   | 0.08 | 950     | 12.5 × 13.5 | 0.08  | 1100      | 16 × 16.5   | 0.035 | 1800        |                             |           |                 |
| 1500                | 152 | 10 × 10     | 0.08 | 850  | 10 × 13.5   | 0.08 | 950     | 12.5 × 13.5 | 0.08 | 1100    |             |       |           |             |       |             |                             |           |                 |
| 2200                | 222 | 10 × 13.5   | 0.08 | 950  | 12.5 × 13.5 | 0.08 | 1100    |             |      |         | 16 × 16.5   | 0.035 | 1800      |             |       |             |                             |           |                 |
| 3300                | 332 | 12.5 × 13.5 | 0.08 | 1100 |             |      |         |             |      |         |             |       |           |             |       |             | Case size<br>φD × L<br>(mm) | Impedance | Rated<br>ripple |

| V<br>Cap. (μF) Code | 63  |                        |              |            | 80                     |              |          | 100                         |           |                 |
|---------------------|-----|------------------------|--------------|------------|------------------------|--------------|----------|-----------------------------|-----------|-----------------|
|                     | 1J  |                        |              |            | 1K                     |              |          | 2A                          |           |                 |
| 3.3                 | 3R3 |                        |              |            | 5 × 5.8                | 5.00         | 25       |                             |           |                 |
| 4.7                 | 4R7 | 5 × 5.8                | 3.00         | 50         | 6.3 × 5.8              | 3.00         | 40       |                             |           |                 |
| 10                  | 100 | 6.3 × 5.8              | 1.50         | 80         | 6.3 × 7.7<br>● 8 × 6.2 | 2.40<br>2.40 | 60<br>60 |                             |           |                 |
| 22                  | 220 | 6.3 × 7.7<br>● 8 × 6.2 | 1.20<br>1.20 | 120<br>120 | 8 × 10                 | 1.30         | 130      | 8 × 10                      | 1.30      | 130             |
| 33                  | 330 | 8 × 10                 | 0.65         | 250        | 8 × 10                 | 1.30         | 130      | 10 × 10                     | 0.70      | 200             |
| 47                  | 470 | 8 × 10                 | 0.65         | 250        | 10 × 10                | 0.70         | 200      | 12.5 × 13.5                 | 0.32      | 500             |
| 68                  | 680 | 10 × 10                | 0.35         | 400        | 12.5 × 13.5            | 0.32         | 500      | 12.5 × 13.5                 | 0.32      | 500             |
| 100                 | 101 | 10 × 10                | 0.35         | 400        | 12.5 × 13.5            | 0.32         | 500      | 16 × 16.5                   | 0.17      | 793             |
| 150                 | 151 | 12.5 × 13.5            | 0.16         | 800        | 12.5 × 13.5            | 0.32         | 500      | 16 × 16.5                   | 0.17      | 793             |
| 220                 | 221 | 12.5 × 13.5            | 0.16         | 800        |                        |              |          | 18 × 16.5                   | 0.15      | 917             |
| 330                 | 331 |                        |              |            | 16 × 16.5              | 0.17         | 793      | 18 × 16.5                   | 0.15      | 917             |
| 470                 | 471 | 16 × 16.5              | 0.082        | 1410       | 18 × 16.5              | 0.15         | 917      | Case size<br>φD × L<br>(mm) | Impedance | Rated<br>ripple |
| 680                 | 681 | 18 × 16.5              | 0.08         | 1690       |                        |              |          |                             |           |                 |

Max. Impedance (Ω) at 20°C 100kHz, Rated ripple current (mA rms) at 105°C 100kHz

●: In this case, [6] will be put at 12th digit of type numbering system.

## ● Frequency coefficient of rated ripple current

| Frequency   | 50Hz | 120Hz | 300Hz | 1kHz | 10kHz or more |
|-------------|------|-------|-------|------|---------------|
| Coefficient | 0.35 | 0.50  | 0.64  | 0.83 | 1.00          |

● Taping specifications are given in page 23.

● Recommended land size, soldering by reflow are given in page 18, 19.

● Please refer to page 3 for the minimum order quantity.