







DATE	DESCRIPTION	REV.
2.25.10	CHANGE AS PER ECN 10-017	A
6.01.11	CHANGE AS PER ECN 11-077	B
11.05.12	CHANGE AS PER ECN 12-155	C
2.20.13	CHANGE AS PER ECN 13-019	D




Top Shell

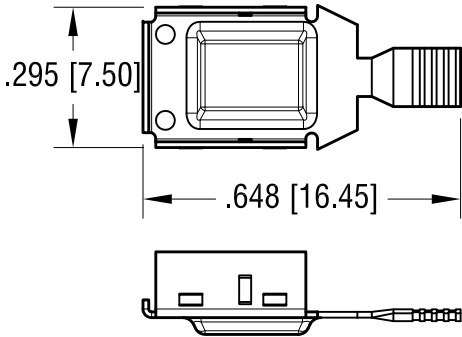


Insulator Body

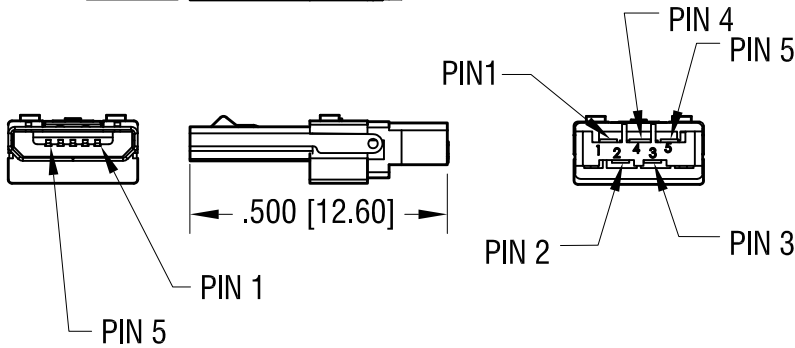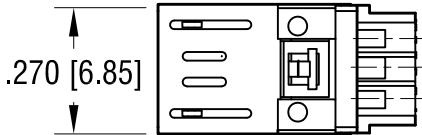

Bottom Shell

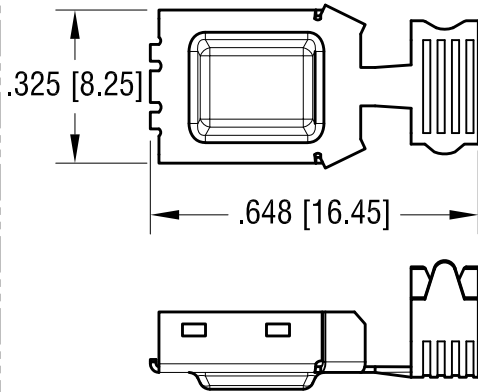

Supplied Unassembled

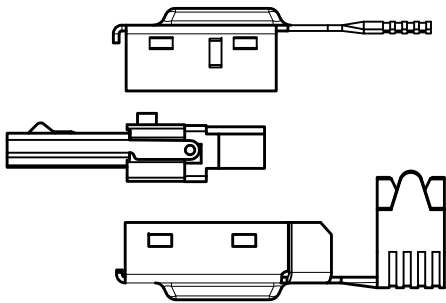

Notes:

Materiall:

Shell: Steel, Nickel Plate.

Insulator: PBT, UL 94-V0 (Color Black)

Contacts: Phosphor Bronze

Finish:

Contact Area: Gold Plate over Nickel Plate

on Solder Tail: Tin Plate over Nickel Plate

Electrical Specifications

Rated Voltage: 30V AC (rms)


Contact Current Rating: 1.5 Amp

Contact Resistance: 30 milliohms Max.

Dielectric Withstanding: 100V AC

Operating Temperature: -30°C to 85°C

ACTUAL SIZE



THIS DOCUMENT IS THE PROPERTY OF KEYSTONE ELECTRONICS CORP. AND SHALL NOT BE REPRODUCED, DISTRIBUTED OR USED AS A BASIS FOR MANUFACTURE WITHOUT PRIOR WRITTEN PERMISSION FROM KEYSTONE ELECTRONICS CORP.

KEYSTONE ELECTRONICS CORP.			
www.keyelco.com • ASTORIA, N.Y. 11105-2017 • Tel (718) 956-8900			
PART NAME		MICRO USB PLUG	
MATERIAL		AS NOTED	
FINISH		AS NOTED	DRN BY NT
			DATE 11.23.09
			SCALE 2.5X
TOLERANCES INCH [MM]		CODE C	DWG NO. 941
DECIMAL ± .010 [± 0.25]			
ANGULAR ± 1°			
UNLESS OTHERWISE SPECIFIED			