


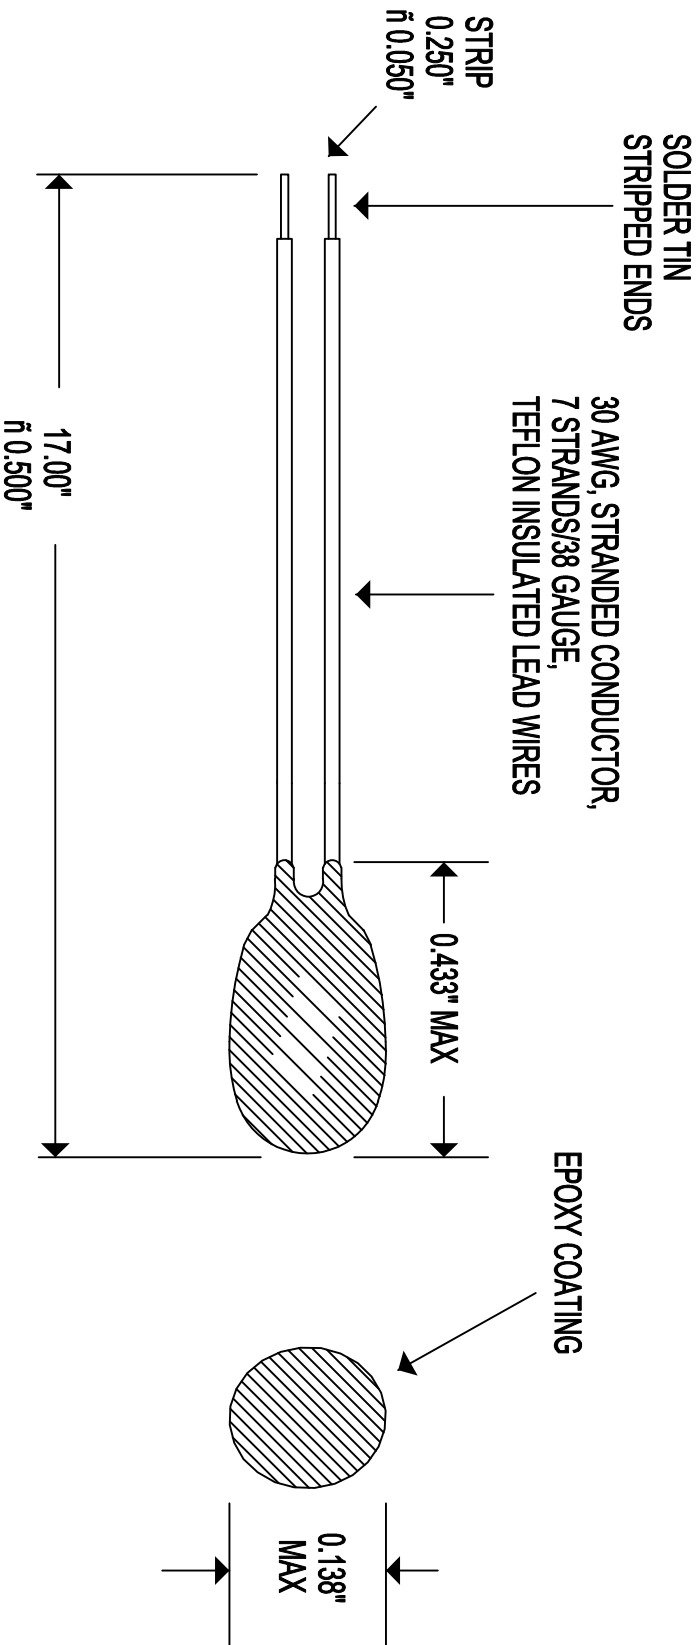

RESISTANCE @ +25°C = 10KOHM ±3%  
RESISTANCE/TEMPERATURE CURVE = "J"  
BETA "β" (+25 TO +100°C) = 3,988K ±1.0%  
DISSIPATION CONSTANT = 1 mW/°C NOMINAL  
THERMAL TIME CONSTANT = 20 SECONDS NOMINAL (STILL AIR)  
MAXIMUM TEMPERATURE RATING = +150°C

SEE MANUFACTURING SPECIFICATION (LAYER 1)

| REV | REVISION RECORD                       |  | DATE     | APP |
|-----|---------------------------------------|--|----------|-----|
| "A" | RELEASE TO PRODUCTION                 |  | 06/24/19 | DN  |
| "B" | CHNG HEAD FM 0.23"0.09 TO 0.433"0.138 |  | 09/25/19 | DN  |
|     |                                       |  |          |     |

|          |              |
|----------|--------------|
| SCALE    | NONE         |
| DRAWN BY | DENNY NGUYEN |
| DATE     | 06/24/19     |
| REV.     | "B"          |
| LAYER    | 0 OF 2       |

|                               |         |
|-------------------------------|---------|
| ©COPYRIGHT                    |         |
| U.S. SENSOR CORP.             |         |
| 714-639-1000 www.ussensor.com |         |
| NTC THERMISTOR                |         |
| P/N                           | USX3570 |