




### ZL201, ZL202 SERIES 2.54 MM (0.100") STRAIGHT PIN HEADER

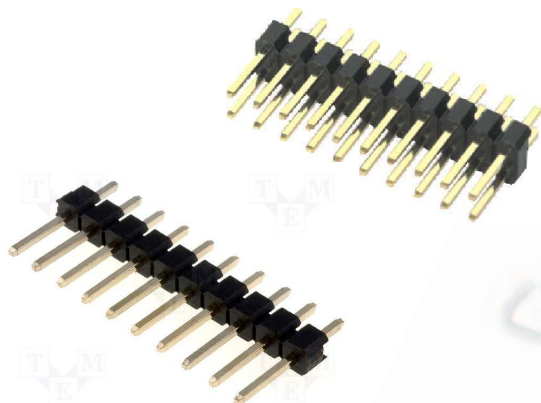

#### Specification:


- 1) To +105° Current Rate: 3 A
- 2) Dielectric Withstanding Voltage: 500 VAC
- 3) Insulation Resistance: 5000 M
- 4) Temperature: -55°C ~ 105°C
- 5) Insulator: Thermoplastic (UL94V-0)
- 6) Contact: Copper Alloy
- 7) Contact Plated: Gold Flash

| Series No. | No. of Contact (N) |
|------------|--------------------|
| ZL201-10G  | 1 x 10             |
| ZL201-20G  | 1 x 20             |
| ZL201-36G  | 1 x 36             |
| ZL201-40G  | 1 x 40             |
| ZL201-50G  | 1 x 50             |
| ZL202-20G  | 2 x 10             |
| ZL202-40G  | 2 x 20             |
| ZL202-80G  | 2 x 40             |
| ZL202-100G | 2 x 50             |

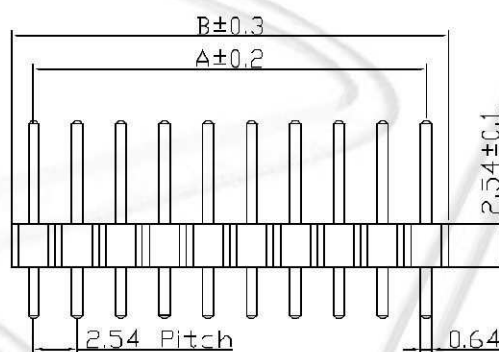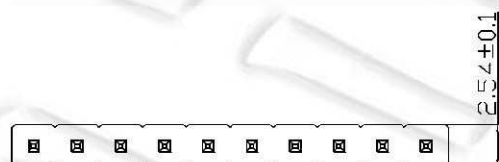

$$A = 2.54 * (N)$$


$$B = A + 2.54$$



**ZL201**

All dimensions in mm.

### ZL201, ZL202 SERIES 2.54 MM (0.100") STRAIGHT PIN HEADER

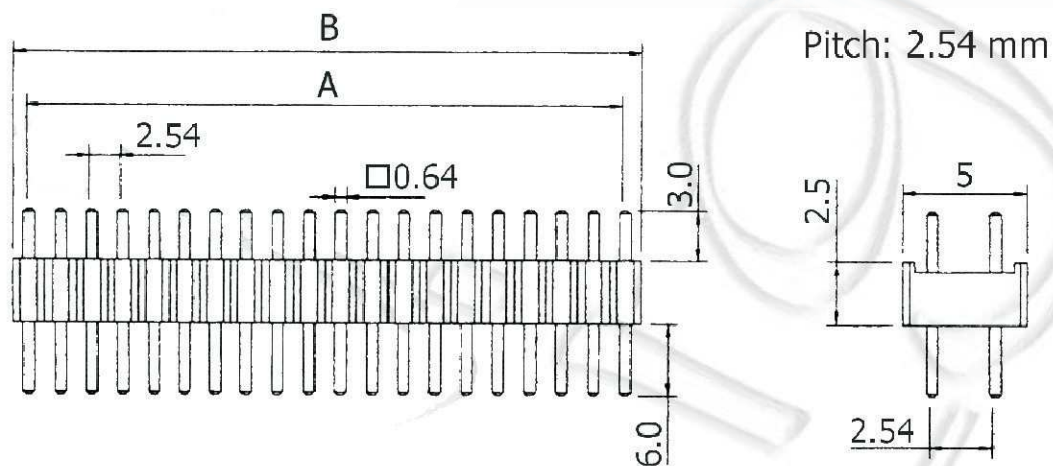

$$A = 2.54 * \left(\frac{N}{2} - 1\right)$$

$$B = 2.54 * \frac{N}{2}$$

All dimensions in mm.

**ZL202**