


Stiftleisten, Raster 2.54, Doppelreihig

Pin Header, Pitch 2.54, Double Row

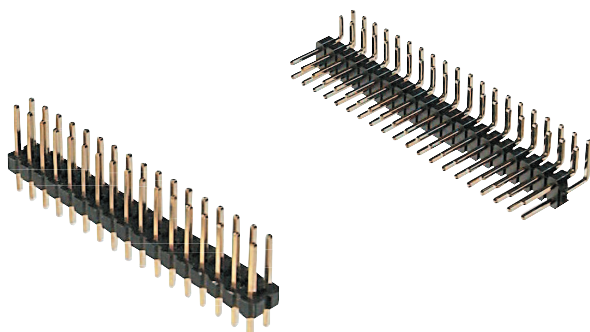

Isolierkörper
Polyester, UL94V-0

Nennstrom
3A

Kontakt material
Messing

Insulationswiderstand
5000MΩ min.

Durchschlagsspannung
500V AC

Betriebstemperatur
-40°C bis +105°C

Insulator material
Polyester, UL94V-0


Current rating
3A

Contact material
Brass


Insulator resistance
5000MΩ min.

Dielectric withstanding
500V AC


Operating temperature
-40°C to +105°C



Gerade Stifte / Straight pins



Gewinkelte Stifte / Angled pins

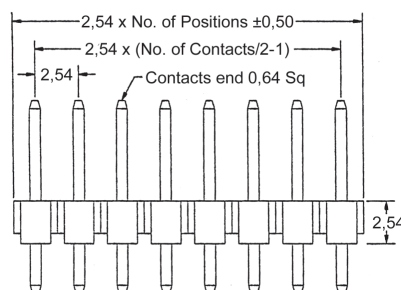

Bestellcode:
Ordercode :

AWL254

D

-

x

-

x

-

x

Bitte „x“ durch die unten geeignete Option ersetzen
Please replace „x“ with appropriate option listed below

1. 2. 3. 4.

1.

Ausführung

G -gerade
A -abgewinkelt

Version

G -straight
A -right angled

2.

Oberfläche

G -flash vergoldet *
Z -verzinkt
S -selektiv

Contact plating

G -flash gold *
Z -tinn
S -selective

3.

Polzahl

04 - 80

Number of contacts

04 - 80

4.

Stiftlänge

D -A=6mm, B=3mm*
A -A=7mm, B=3mm (nur gerade)

Pin length

D -A=6mm, B=3mm*
A -A=7mm, B=3mm (only straight)

* Standard

D-Sub / Hoods
Centronics

Multiflex

Modular

USB

Switches

Powercords
Powersockets

MiniDIN

DIN4161x
Hardmetric

Sockets + Strips
Jumper