

REV.	DESCRIPTION	DRAWN	CHECKED	APPROVED
A	NEW RELEASE	LJH 09/22/05'		LJC 09/22/05'
B	HOUSING CHANGE	JLZ 07/25/14'		LJC 07/25/14'
C	TERMINAL CHANGE	JLZ 07/25/14'		

NOTES:

1. ELECTRICAL CHARACTERISTICS:
1.1 CONTACT RESISTANCE: 20mΩ Max. INITIAL.
1.2 DIELECTRIC WITHSTANDING VOLTAGE: 500V AC(rms) FOR 1 MINUTE.
1.3 INSULATION RESISTANCE: 1000MΩ Min.




2. ENVIRONMENT CHARACTERISTICS:
2.1 TEMPERATURE: -40°C~+105°C.

3. PART NUMBER: DS1026-05


4. PRODUCT NUMBER CODE:

DS1026-05 - X X X X X

CONTACTS TYPE
V:VERTICAL TYPE
HOUSING COLOR
B:BLACK
CONTACT PLATING
8: FULL GOLD FLASH
CONNECTOR TYPE
S:SOCKET
No.OF CONTACTS
2*2-2*X
SERIES No.
DS1026-05

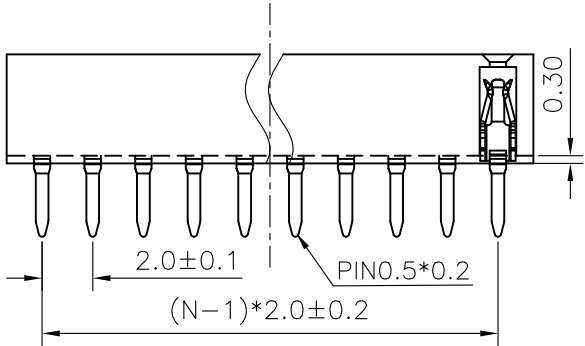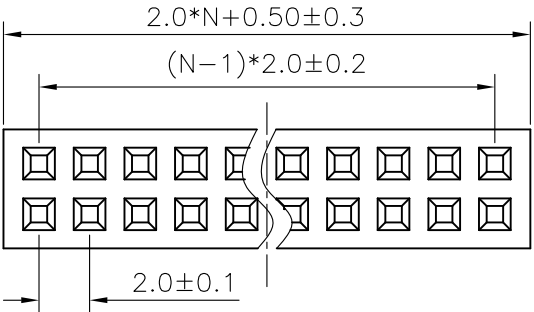

N: NUMBER OF CONTACTS/2

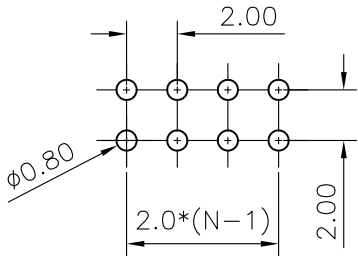

RECOMMEND PCB LAYOUT
(TOLERANCE=±0.05)

GENERAL TOLERANCE		ANGLE TOLERANCE		PROJECTION		TITLE	FEMALE HEADER PITCH 2.0mm Vertical Through TYPE	
X.	±0.60	X.	±5°	UNITS	mm			
.X	±0.38	.X	±3°	SHEET SIZE	A4	SERIES	DS1026-05 SERIES	
.XX	±0.25	.XX	±2°					
DRAWING TYPE		CUSTOMER		 晨翔电子有限公司 CONNFLY CONNFLY ELECTRONIC CO. LTD				
SCALE		1:1	SHEET					
DRAWING NO.		C-DS1026-05-XXXXX-C	1 OF 1					