


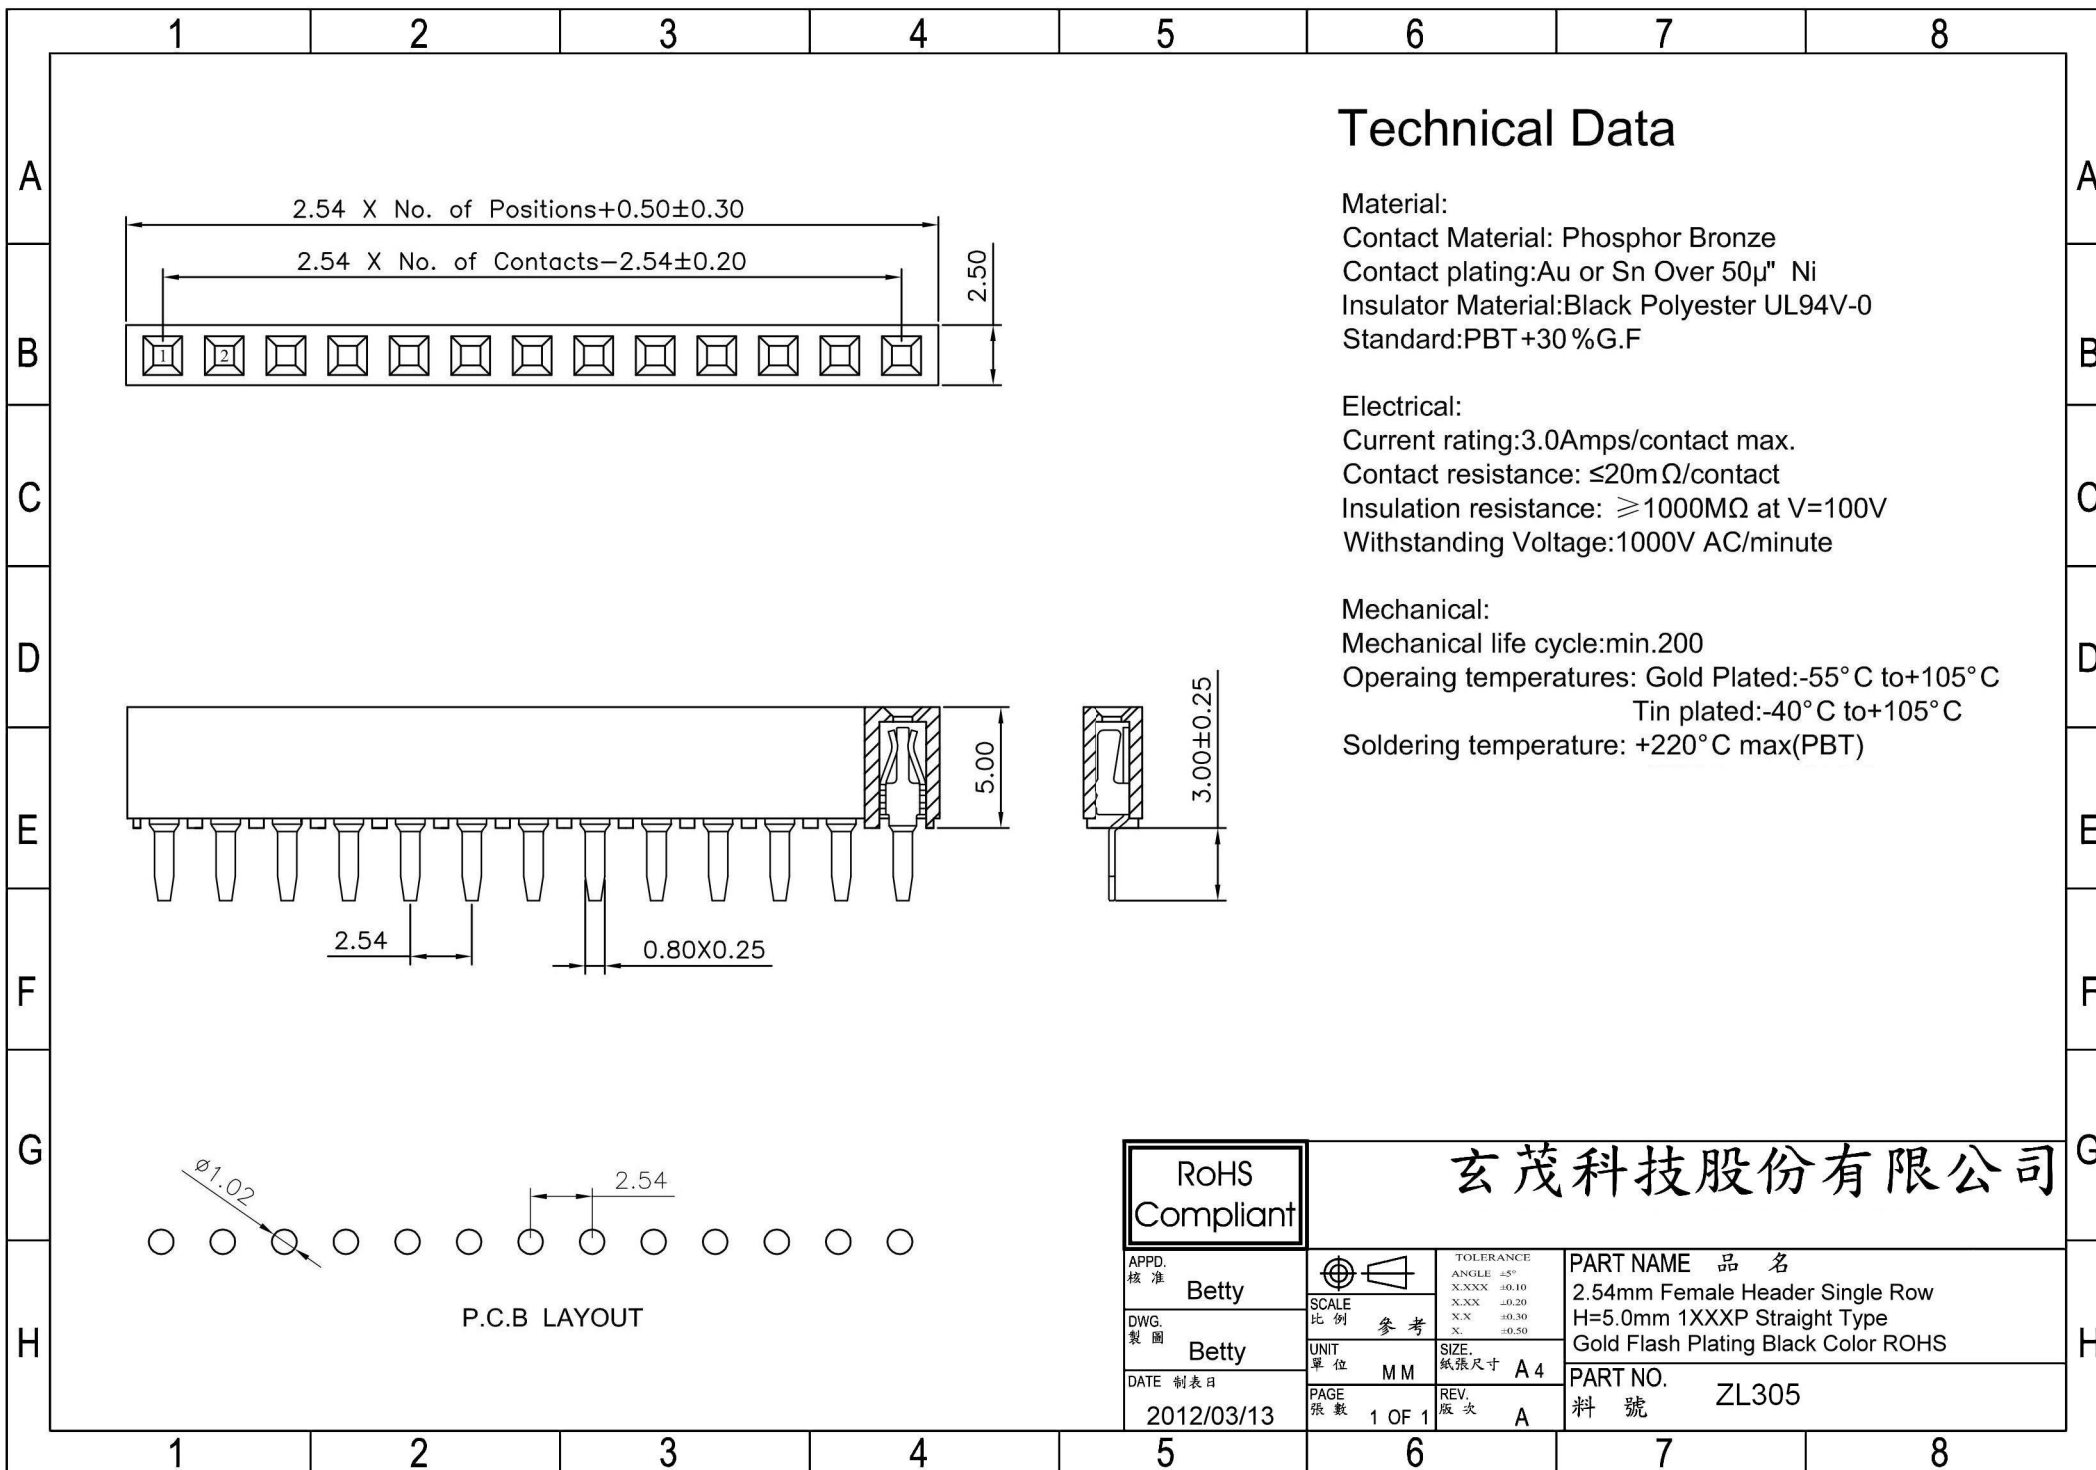

Technical Data

Material:

Contact Material: Phosphor Bronze

Contact plating: Au or Sn Over 50μ" Ni

Insulator Material: Black Polyester UL94V-0

Standard: PBT +30 %G.F

Electrical:

Current rating: 3.0Amps/contact max.

Contact resistance: ≤20mΩ/contact

Insulation resistance: ≥1000MΩ at V=100V

Withstanding Voltage: 1000V AC/minute

Mechanical:

Mechanical life cycle: min.200

Operating temperatures: Gold Plated: -55°C to +105°C

Tin plated: -40°C to +105°C

Soldering temperature: +220°C max(PBT)

RoHS
Compliant

玄茂科技股份有限公司

APPD.
核准


Betty

DWG.
製圖

Betty

DATE 制表日

2012/03/13



SCALE
比例

參考

UNIT
單位

M M

PAGE
張數

1 OF 1

TOLERANCE
ANGLE ±5°
X.XXX ±0.10
X.XX ±0.20
X.X ±0.30
X ±0.50

SIZE.
紙張尺寸

A 4

REV.
版次

A

PART NAME 品名

2.54mm Female Header Single Row

H=5.0mm 1XXXP Straight Type

Gold Flash Plating Black Color ROHS

PART NO.

ZL305

料號