



REV.	DESCRIPTION	DRAWN	CHECKED	APPROVED
A	NEW RELEASE	LJH 06/22/05'		

NOTES:


- ELECTRICAL CHARACTERISTICS:
 - CONTACT RESISTANCE: 50mΩ Max. INITIAL.
 - DIELECTRIC WITHSTANDING VOLTAGE: 300V AC(rms) FOR 1 MINUTE.
 - INSULATION RESISTANCE: 1000MΩ Min.
- ENVIRONMENT CHARACTERISTICS:
 - OPERATING TEMPERATURE: -40°C~+105°C.
- PART NUMBER: DS1031-08
- PRODUCT NUMBER CODE:

DS1031-08 - X X X X X X X X


DIM.A C TYPE
1: TYPE 1
2: TYPE 2
3: TYPE 3
.....
HOUSING HEIGHT(DIM.B)
1: 1.00mm
2: 1.50mm
3: 1.70mm
4: 2.00mm
MOUNTING TYPE
S: SMT TYPE
HOUSING COLOR
B:BLACK
CONTACT PLATING
8: FULL GOLD FLASH
CONNECTOR TYPE
P:PLUG
No.OF CONTACTS
2*1-2*40
SERIES No.
DS1031-08

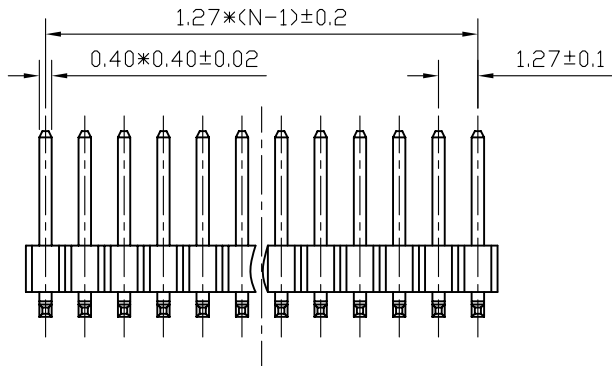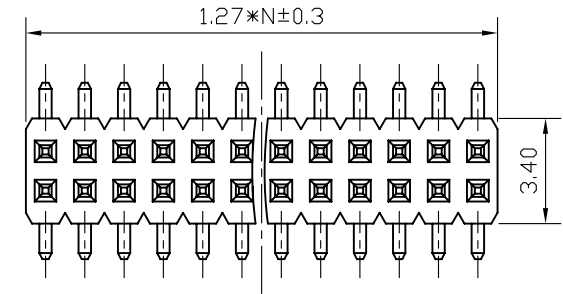

N:NUBMER OF CONTACTS/2

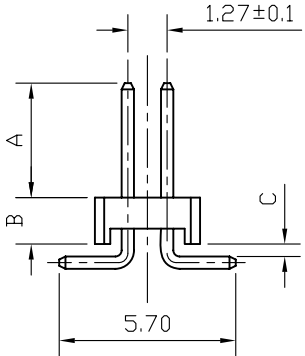

TYPE	DIM A	DIM C
1	3.70	0.40
2	3.00	0.40
3	3.30	0.20
4	3.30	0.40
5		

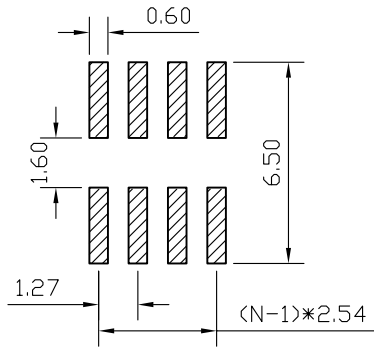

RECOMMEND PCB LAYOUT(TOLERANCE=±0.05)

GENERAL TOLERANCE		ANGLE TOLERANCE		PROJECTION		TITLE	
X.	±0.60	X.	±5°	UNITS	mm	PIN HEADER PITCH 1.27mm SMT TYPE	
.X	±0.38	.X	±3°	SHEET SIZE	A4	SERIES	DS1031-08 SERIES
.XX	±0.25	.XX	±2°				
DRAWING TYPE		CUSTOMER		 晨翔电子有限公司 CONNFLY CONNFLY ELECTRONIC CO. LTD			
SCALE		1:1	SHEET 1 OF 1				
DRAWING NO.		C-DS1031-08-XXXXXX					