



4-conductor chassis-mount terminal strip; 1 snap-in foot per pole; N-PE-L1; with ground contact; 3-pole

Item No.: 862-8533



4-conductor chassis-mount terminal strip; 1 snap-in foot per pole; N-PE-L1; with ground contact; 3-pole

Marking

RoHS ✓
Compliant

Business data

Supplier	WAGO
Item no.	862-8533
GTIN / EAN	4044918510417
Content	1
Order amount	250
Customer item number	

Notes

Technical data


Miscellaneous

Packaging type	bag
Rated voltage (III / 3) [V]	500 [V]
Rated impulse voltage (III / 3) [kV]	6 [kV]
Rated current [A]	32 [A]
Total number of potentials	3
Type of wiring	Side-entry wiring

Technical data	
Connection technology	Push-in CAGE CLAMP®
Number of connection points connector	4
Actuation type	Operating tool
Connectable conductor materials	Copper
Solid conductor	0.5 ... 4 mm² / 20 ... 12 AWG
Solid conductor, push-in termination	0.5 ... 4 mm² / 20 ... 12 AWG
Stranded conductor	0.5 ... 4 mm² / 20 ... 12 AWG
Fine-stranded conductor	0.5 ... 4 mm² / 20 ... 12 AWG
Fine-stranded conductor with ferrule with plastic collar	0.5 ... 4 mm² / 20 ... 12 AWG
Fine-stranded conductor with ferrule, push-in termination fr	0.5 mm² / 20 AWG
Strip length	10 ... 11 mm / 0.39 ... 0.43 Inch
Width	36 mm / 1.417 Inch
Height from the surface	22.3 mm / 0.878 Inch
Depth	35 mm / 1.378 Inch
No. of poles	3
Mounting type	Snap-in mounting foot
Total number of connection points	12
Marking	N-PE-L1
Color	black
Fire load [MJ]	0.39 [MJ]
RoHS Conformity	1
Weight [g]	21.275 [g]

Printview: 4-conductor chassis-mount terminal strip; 1 snap-in foot per pole; N-PE-L1; with ground contact; 3-pole - Item No.: 862-8533

Images & drawings

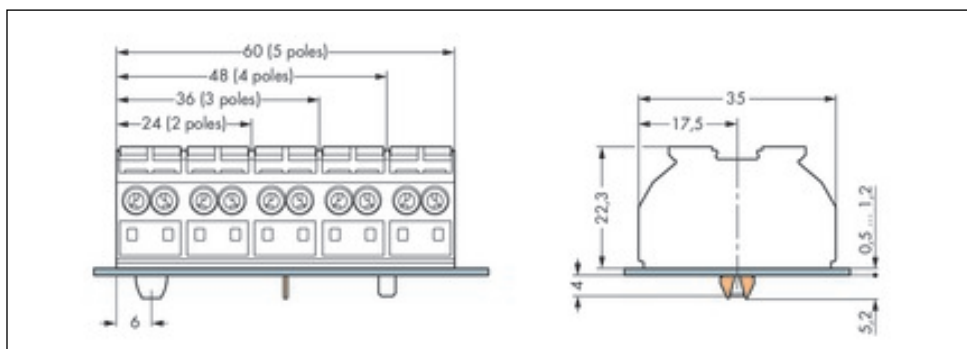

Address

WAGO Kontakttechnik GmbH & Co. KG

Hansastr. 27

32423 Minden

Telefon: 0571/887-0

Fax: 0571/887-169

<http://www.wago.com>

© WAGO Kontakttechnik GmbH & Co. KG

Technische Änderungen und Irrtümer vorbehalten.