

The information provided herein is from CONNELY Electronic Co., Ltd. and is confidential. Any disclosure to a party other than the recipient is prohibited. The intellectual properties and its rights contained herein, including but not limited to, trademarks, patents, copyrights, trade secrets, and technical know-how, are owned exclusively by CONNELY or its affiliates. Unauthorized use of this information in any format or manner, CONNELY may enforce its intellectual property rights at its own discretion; failures or delays to exercise such rights does not constitute a waiver of such rights.


Dept	Qty
DC	1
ED	1
IE	1
ISO	1
PD	1
R&D	1
SD	1
QA	1
QC	1
QE	1

1
2
3
4
5
6
7
8

REV.	DESCRIPTION	DRAWN	CHECKED	APPROVED
A	NEW RELEASE	LL 09/11/06'	~	LJC 09/11/06'
B	Arrangement drawing	JLZ 12/23/15'	HZW 12/23/15'	LJC 12/23/15'
C	DRAWING UPDATE	JLZ 08/27/18'	~	

NOTES:

1. MATERIAL
1.1 INSULATOR:THERMOPLASTIC(UL 94V-0).
1.2 CONTACT: COPPER ALLOY.
2. SPECIFICATION
2.1 TEMPERATURE RANGE:-40°C~+105°C.
2.2 CONTACT RESISTANCE:20mΩ max.
2.3 INSULATION RESISTANCE:1000MΩ min.
2.4 DIELECTRIC WITHSTANDING VOLTAGE:AC 500V PER MINUTE.
3. PART NUMBER: DS1015
4. PRODUCT NUMBER CODE:
DS1015 - X X X X
- HOUSING COLOR
A:GRAY
B:Black
- CONTACT PLATING
2: GOLD FLASH + NICKEL
- STRAIN RELIEF
M:W/
N:W/O
- SCREW HOLE
M:W/
N:W/O
- No. OF CONTACTS
10 14 16 20 24 26
30 34 40 50 60 64

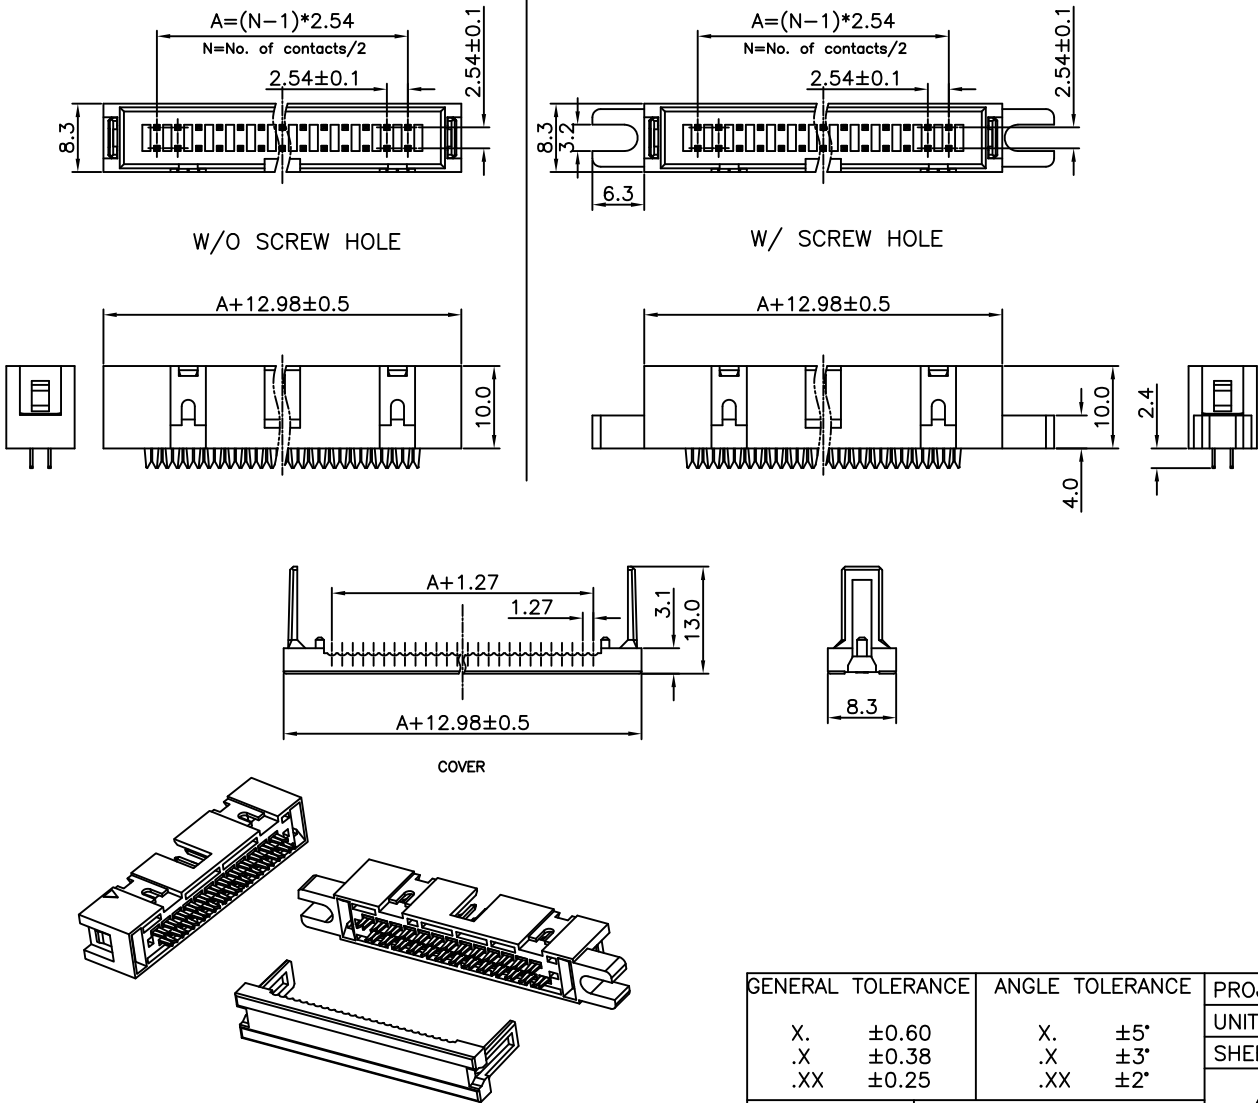

GENERAL TOLERANCE		ANGLE TOLERANCE		PROJECTION		TITLE	IDC BOX HEADER MATES WITH PITCH 1.27mm FLAT CABLE	
X.	±0.60	X.	±5°	UNITS	mm			
.X	±0.38	.X	±3°	SHEET SIZE	A4	SERIES		
.XX	±0.25	.XX	±2°			DS1015 SERIES		
DRAWING TYPE		CUSTOMER		 晨翔电子有限公司 CONNFLY CONNFLY ELECTRONIC CO. LTD				
SCALE		1:1	SHEET					1 OF 1
DRAWING NO.		C-DS1015-XXXXX-C						

晨翔电子有限公司
CONNELY CONNELY ELECTRONIC CO. LTD